

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 825 422 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
25.02.1998 Bulletin 1998/09

(51) Int Cl.<sup>6</sup>: G01F 11/04, G01F 11/22,  
G01F 11/06

(21) Application number: 97810106.1

(22) Date of filing: 27.02.1997

(84) Designated Contracting States:  
CH LI

• Penn, Laurence Richard  
Kettering, Northants NN15 5LY (GB)

(30) Priority: 19.08.1996 US 699636

(71) Applicant: Keller, Wilhelm A.  
CH-6402 Merlisbachen (CH)

(74) Representative:  
AMMANN PATENTANWAELTE AG BERN  
Schwarztorstrasse 31  
3001 Bern (CH)

(72) Inventors:  
• Keller, Wilhelm A.  
6402 Merlisbachen (CH)


### (54) A metering device

(57) A metering device includes an inlet (2) and outlet (3) for a material (liquids, gases or solid particles) to be metered, a rotatable ball (4) driven by a shaft (5) and interposed between inlet (8a) and outlet (8) seats. The rotatable ball has a transverse bore (9) containing a sealess shuttling member (10) which can reciprocate back and forth along the bore between two sealing seats (11, 12) so as to seal against one or the other. The sealess shuttling member which is cylindrical-shaped and has ends which are adapted to sealingly engage sealing

seats provided at each end of said transverse bore is propelled by pressurized material which flows into the bore without surface-to-surface contact of the shuttling member with the bore wall until it engages one of the two sealing seats. Each time the rotatable ball rotates 180°, a metered shot is ejected resulting in a quasi continuous flow depending upon a rotatable ball revolution rate.

Such a metering device allows an exact metering of a great range of material and has few working parts.

FIG. 1

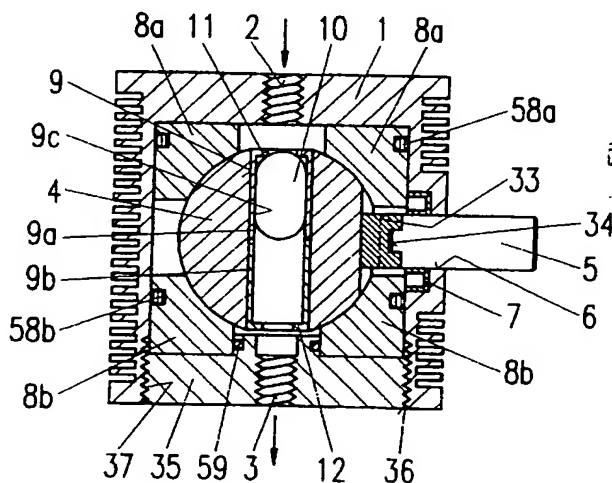

BEST AVAILABLE COPY

## Description

The present invention relates generally to a metering device and more specifically to a metering device which features a rotatable metering element, according to the introduction of independent claim 1.

Such a metering device is disclosed in EP-A- 0 646 776 of the same applicant, characterized in that the shuttling member is a ball. Further studies have shown that it is useful to increase the field of application and to focus on the shape and consistency of the shuttling member on one hand and on the increasing of the metering rate on the other hand.

PCT Publication WO 90/10198 discloses a metering device which features a linearly movable metering head which is reciprocally disposed within an elongated rotatable member. This device suffers from sealing problems, and, due to its linear design, is relatively bulky for some applications. United States Patent No. 4,058,240 to Becker discloses an automatic drain for a compressed air system which uses a rotating ball. However, this arrangement suffers from the drawback that the ball has no through bore and therefore the amount of gas which can be vented per rotation is limited.

United States Patent 3,387,748 to Brechley discloses a motor driven metering valve characterized in that a free piston is reciprocally disposed in a bore formed in a ball-shaped valve member. This free piston is provided with sealing rings and is retained within the bore by retaining rings. However, this arrangement suffers from the drawback that the sealing rings, with the passing of time, a) tend to trap particles and thus invite possible malfunction, and b) wear down and tend to lose their sealing properties. This latter problem allows a leak path to be established permitting fluid to escape past the piston and therefore reduce the precision with this the fluid can be metered.

United States Patent No. 3,037,738 to Jackson et al. discloses a manually operated rotary valve which is not equipped with a metering arrangement. Adjustable valve seats are provided at the upstream and downstream ends of the valve.

Starting from this prior art it is the object of the present invention to provide a metering device which, while allowing an exact metering and solves, in a simple manner, the sealing problems of the rotatable member, offers additional advantages in relation to the above mentioned prior art arrangements in view of an increased range of applications. This object is attained with the metering device according to independent claims 1 and 2.

It is a further object of the present invention to provide a metering device which can be used for metering gases, liquids and solid particles and which offers an increased metering rate. This object is achieved with a metering device according to the dependent claims, in particular claims 8 and 9.

The invention will be explained hereinafter, by way

of example, with reference to the accompanying drawings, in which

FIG. 1 shows schematically a section of a first embodiment according to the invention;

FIG. 2 shows a section at 90° of Fig. 1 of a detail;

FIG. 3 shows a section of a variant of the first embodiment;

FIG. 4 shows a section of a further embodiment of the invention with two metering units;

FIG. 5 shows a variant of a further embodiment of the invention;

FIG. 6 shows a further embodiment of the invention with a rotatable ball having two transverse bores;

FIG. 7 shows a variant to the embodiment with the rotatable ball having two off-centred transverse bores;

FIG. 8 shows a section according to line XIII-XIII in Fig. 7;

FIG. 9 shows a further embodiment of the invention with a rotatable ball having two pairs of transverse bores;

FIG. 10 shows a section according to line X-X in Fig. 9;

FIG. 11 shows an use of the invention in a layout for a two component proportioning and mixing apparatus.

The following detailed description of the invention is directed to a metering device for fluids, including liquids and gases, however, such devices can be used for solid particles as well.

Fig. 1 shows schematically a first embodiment of a metering device which includes a housing 1, in which an inlet port 2 and diametrically opposed outlet port 3, are formed. The inlet port 2 is connected to a supply or source of fluid which requires metering and the outlet port 3 is connected to a dispensing apparatus. The metering member is a spherical, rotatable member, preferably a ball 4, which is coupled to a drive shaft 5 by way of a keyway shaft or like type of coupling 33. This drive shaft 5 is supported in a bearing 6 which is provided with an appropriate seal 7. A drive system such as an electric motor, gear box and the electric controls for driving the rotatable ball can be conventional arrangements.

It is preferable, from the point of correct and trouble free operation, that a spherical outlet seat 8b is provided at the outlet side of the rotatable ball 4 in order to form a seal at less cost and more durable and effective than the seal arrangements used in the prior art. The inlet seat 8a may also be spherical. The rotatable ball 4 has a transverse bore 9 in which it is advantageous to install cylindrical sleeves 9a, 9b with an inner bore 9c and sealing seats 11 and 12 at each end respectively. The sleeves 9a, 9b may be made of any appropriate material enabling the formation of the sealing seats.

The element which controls the metering operation is, in the following embodiment, called the shuttling

be selected relative to its diameter in a manner to prevent it from jamming within the bore and scuffing the wall of the metering bore.

Fig. 4 shows an embodiment in which the metering capacity has been doubled while simultaneously providing a smoother flow, by employing two rotatable balls 13 and 14 with a shuttling member 10 in each, sliding in inner bore 9c between equal seats 11 and 12, the two transverse bores 9c being arranged at a 90° angle in relation to each other. The two rotatable balls 13 and 14 are connected by a connecting piece 15 and one rotatable ball 14 is driven by the drive shaft 16, being provided with bearing 6 and seal 7. Housing 17 has two inlets 18 and two outlets 19. It is evident that also in this case the inlet pressure must be maintained above, and preferably with a safety factor, the required outlet pressure. It will be further appreciated that the invention, resp. the metering device is not limited to one or two rotatable balls. Therefore, the number of inlets and outlets may vary and the transverse bores may be arranged at an angle of 180°/N, if N is the number of rotatable members.

As different from the aforementioned embodiments, Fig. 5 shows a variant such that the spherical seats 65 and 66 may be exposed to independent fluid pressures. The spherical inlet seat 65 has a protruding annular face 76a which is situated inside the housing 61 within an annular chamber 74a where it is sealed by sealing rings 77a, tensioned against the rotatable ball 64 by a spring 75a, and subjected to fluid pressure through a port 73a. Correspondingly, the spherical outlet seat 66 has a protruding annular face 76b which is situated inside the housing 61 and the removable housing end plate 79 within an annular chamber 74b where it is sealed by sealing rings 77b, tensioned against the rotatable ball 64 by a spring 75b and subjected to fluid pressure through a port 73b. Thus, apart from the pressure of the fluid to be metered which enters through the port 62 and acts upon the face of the seat 65, the same or another fluid pressure can be applied and regulated through the port 73a to act upon the annular face 76a. Also, apart from the pressure of the fluid having been metered which exits through the port 63 and acts upon the face of the seat 66, the same or another fluid pressure can be applied and regulated through the port 73b to act upon the annular face 76b.

The combination of the above provides various options to ensure sealing of the seats 65, 66, against the rotatable ball 64 with the springs 75a, 75b providing pre-tensioning of the spherical seats 65, 66, against the rotatable ball 64.

As a variant, transverse bore 67 has a partial thread 69 with an adjusting screw 70 such that the position of seat 71 may be adjusted from zero shuttling ball movement up to a maximum movement, whereas seat 72 is fixed. This variant can be used for all embodiments, independently of the number of bores.

It can be appreciated that the pressure on the

spherical seats need not be independently provided and that the pressure of the fluid to be dispensed may be sufficient and used alone.

Figs. 6 - 11 cover further embodiments of the invention whereby the rotatable ball has more than one transverse bore for metering. Furthermore, the joint lines between the spherical inlet and outlet seats may, unlike previous embodiments, be other than parallel to the inlet and outlet walls and approximately diagonal, yet allowing for a sealing means between that joint and the housing, such that any potential leakage between that joint line is prevented from flowing through the transverse bores to the outlet port when a transverse bore is adjacent to the joint line.

Compared with Fig. 5, Fig. 6 shows a variant of the independent, and/or material input flow pressure on the seats, and comprises a housing 81, having an inlet port 82 and diametrically opposed an outlet port 83, whereby inlet port 82 is connected to a supply and outlet port 83 to a dispensing apparatus. The rotatable ball 84 is held by the two approximately diagonal divided spherical seats 85 and 86 and comprises two transverse bores 87 and 88 with the same type of seats as in the previous embodiment for the two shuttling members 89 and 90 metering means. In this embodiment the two bores 87, 88 intersect at the centre of the rotatable ball 84.

In this case, as different from the embodiment of Fig. 5, spherical inlet seat 85 is provided, at the inlet port 82, with a piston 91 which has a smaller diameter than the outer diameter of the spherical inlet seat and which is subjected to the fluid pressure at that inlet. This latter arrangement further comprises a O-ring seal 92. The spherical inlet seat is also pre-tensioned by spring means 93 located inside housing 81. The insertable housing element 94 at the spherical outlet seat 86 is similar to the corresponding element of the previous embodiment. That is to say, it comprises fluid inlet port 95 and spring means 93 as well as the corresponding portion of the spherical outlet seat 86 with annular face 96 and sealing means 98. Each spherical seat further comprises an outer diameter O-ring seal 97.

The spherical outlet seat 96 may be pressurized through fluid inlet port 95 which is connected either to the inlet pressure fluid or to an independent fluid pressure means. The provision of a pressure means for each spherical seat enables an exact adjustment of the pressure force, whereby a pressure control means may be provided at fluid inlet port 95. Another adjustment means is provided by adapting the cross-sectional area of piston 91, any such combination being to form a seal between the spherical seats and the rotatable ball. It is appreciated that this pressure application technique may be also applied to the previous embodiments.

Another embodiment according to Figs. 7 and 8 uses two transverse bores 99, 100 which are arranged at ninety degrees to each other and which are off centre within the rotatable ball 101. In the embodiment shown in Figs. 9 and 10, one pair of off centred bores 102 and

103 are arranged at 90° to each other and are at 45° to a second off centred pair of 90° related bores 104, 105 within rotatable ball 106.

As a result of all the above, an increased volume of metered output per rotatable ball cycle may be achieved. For example, two transverse bores provide four metered outputs per cycle, and four transverse bores eight metered outputs per cycle. This is advantageous in decreasing pulsation and lowering potential component wear relative to revolution speeds and metered output.

Fig. 11 shows schematically a possible application of two metering devices of the invention in a proportioning and mixing apparatus 21 for a two component material. Numerals 22 and 23 denote two storage containers for the two components. Pipes 24 and 25 are connected to pumps 26 and 27 or other pressure sources. The pumps transport the material (fluid) under pressure to metering devices 28 and 29, the outlets thereof being attached to a mixing device 20, which can be of the static or dynamic type. The electric motors 30 and 31 of the metering devices as well as the metering devices themselves are connected to and controlled by a computerized control unit 32, which also controls the storage containers, pumps or other pressure sources, as well as the mixing device if it is electrically driven. It is evident that the pressure of the pumps or other pressure sources as well as the delivery of the metering devices can be different one from another, and that the electric parameters can be adjusted and varied.

It follows from the above description that the devices of the invention are less complex, relatively more compact and smaller in size and have relatively lower wear than known devices. They are self-adjusting or may be adjusted to compensate for wear and provide complete sealing against leakage during rotation, thus providing optimum metering accuracy as well as acting as a perfect shut-off valve in any angular position when rotation has stopped and metering has ceased.

Furthermore, such a metering device allows an exact metering of fluids, in shot or flow form, has a very simple construction with few working parts and thus may easily be placed in a pressure transfer system for liquids and gases.

#### Claims

1. A metering device, comprising a housing having a material inlet (2, 18, 62, 82) and a material outlet (3, 19, 63, 83) at least one rotatable ball member (4; 13, 14; 64; 84; 101, 106) having at least one transverse bore (9; 67; 87, 88) in which a sealless flow metering means is disposed, the rotatable ball member being captured between two opposed seats (8a, 8b; 65, 66; 85, 86) disposed in the housing, each seat having at least one passage communicable with one of the material inlet or the material outlet, and means

for adjusting the position of at least one of the two seats within the housing and the sealless flow metering means comprises a shuttling member, characterized in that the shuttling member is a cylindrical-shaped shuttling member (10) having domed ends.

2. A metering device, comprising a housing having a material inlet (2, 18, 62, 82) and a material outlet (3, 19, 63, 83), at least one rotatable ball member (4; 13, 14; 64; 84; 101, 106) having at least one transverse bore (9; 67; 87, 88; 99, 100; 102, 103, 104, 105) in which a sealless flow metering means is disposed, the rotatable ball member being captured between two opposed seats (8a, 8b; 65, 66; 85, 86) disposed in the housing, each seat having at least one passage communicable with one of the material inlet or the material outlet, and means for adjusting the position of at least one of the two seats within the housing and the sealless flow metering means comprises a shuttling member, characterized in that the shuttling member is a spherical ball, cylindrical-shaped, or a piston and so configured and arranged as to have a specific gravity proximate to that of a material to be metered by the metering device.
3. A metering device according to claim 1 or 2, characterized in that the transverse bore (9; 67; 87, 88) has a sealing seat (11, 12) disposed at each end.
4. A metering device according to any of claims 1 to 3, characterized in that at least one of the opposed seats (8a, 8b; 65, 66; 85, 86) provides a passage for the ingress or egress of material and is sealed within the housing.
5. A metering device according to any of claims 1 to 4, characterized in that the adjusting means includes means (35, 75b) for pressing at least one seat against the rotatable ball.
6. A metering device according to any of claims 1 to 5, characterized in that the pressing means is responsive to a pressure differential between the material inlet and the material outlet.
7. A metering device according to any of claims 1 to 6, characterized in that the pressing means is responsive to a pressure differential between independent adjustable external pressures.
8. A metering device according to any of claims 1 to 7, characterized in that the opposed spherical seats (65, 66) have each a protruding annular face (76a, 76b) within an annular chamber (74a, 74b) inside the housing (61), the protruding annular faces being tensioned against the rotatable ball by spring means (75a, 75b).

9. A metering device according to any of claims 1 to 8, characterized in that the rotatable ball member (84, 101, 106) comprises at least a first (87; 99; 102, 104) and a second (88; 100; 103, 105) transverse bore each of which contains one sealess flow metering means (10). 5
10. A metering device according to claim 9, characterized in that the second bore is arranged at a predetermined angle with respect to the first bore, the first and second bores passing through the centre of the rotatable ball member and intersecting with each other. 10
11. A metering device according to any of claims 1 to 10, characterized in that the housing (17) comprises at least a second rotatable ball member (14), the first and second ball members (13, 14) being connected by a drive shaft (16) for synchronous rotation, the second rotatable ball member having a second transverse bore (9) in which a sealess flow metering means (10) is disposed, the second transverse bore being arranged at an angle of  $180^\circ/N$  one to the other, characterized in that N is the number of rotatable members. 15 20 25
12. A metering device according to claim 2, further comprising a sleeve (9a, 9b) which is disposed in the transverse bore (9), the sleeve being integral with the sealing seats at each end of the bore. 30
13. A metering device according to claim 11, characterized in that the first rotatable ball member (13) is loaded by material pressure against one of the two seats, thereby forming a seal. 35
14. The use of at least two metering devices according to one of the claims 1 to 13 in a multi-component proportioning and mixing apparatus, in which the metering devices (28, 29) are fed independently by fluids from corresponding pressure sources (26, 27) and their outlets are connected to a mixing device (20), the storage containers (22, 23), the pumps or other pressure sources, the metering devices (28, 29) including their drives (30, 31) and the mixing device (20) when electrically driven being individually controlled by a computerized control unit (32). 40 45

50

55

FIG. 1

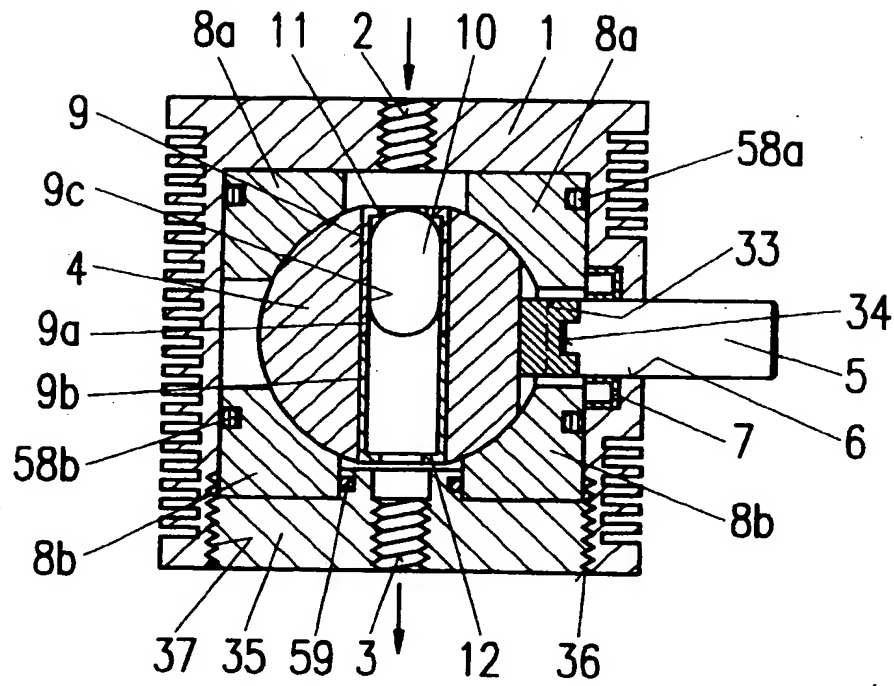


FIG. 2

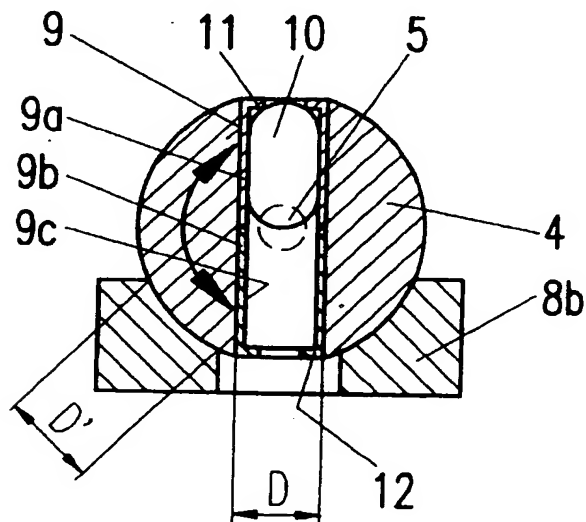


FIG. 3

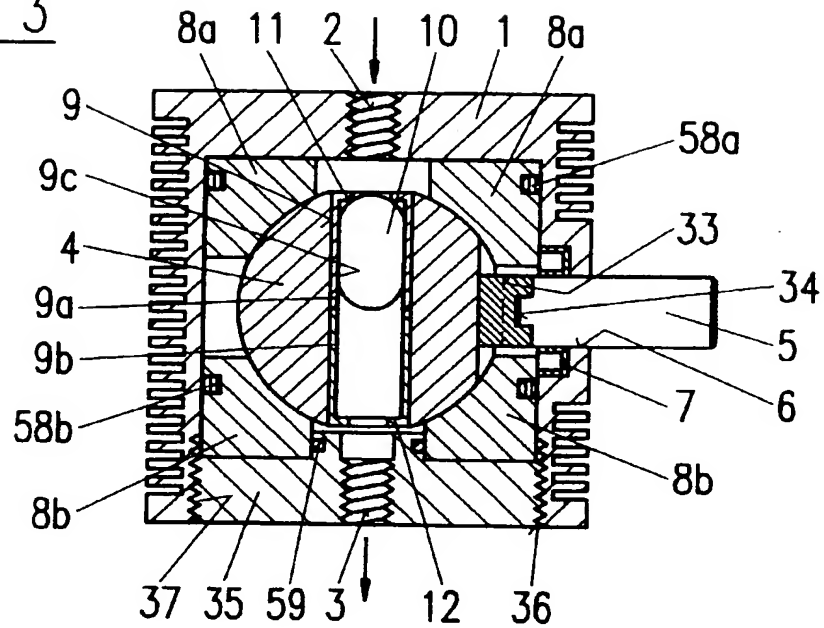


FIG. 4

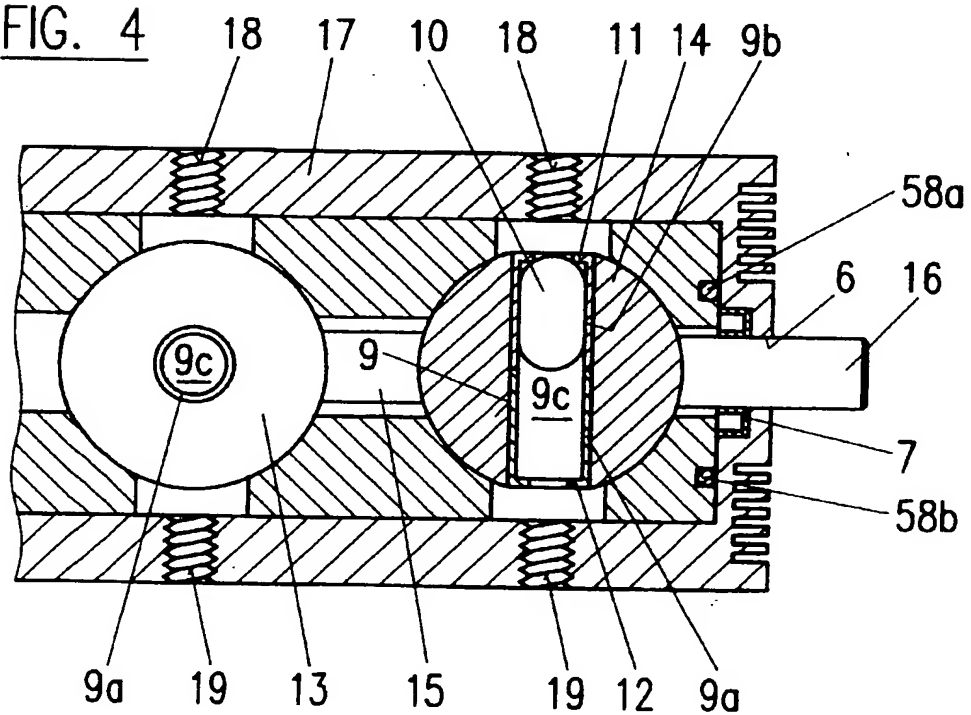


FIG. 5

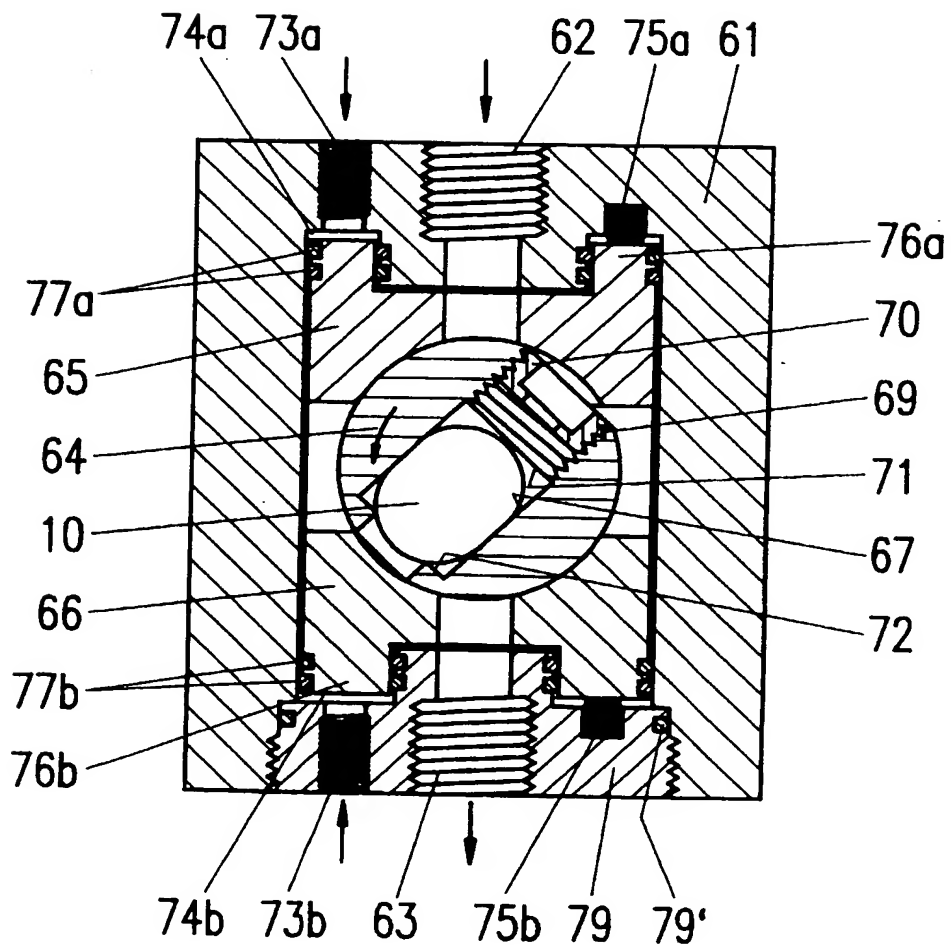




FIG. 6

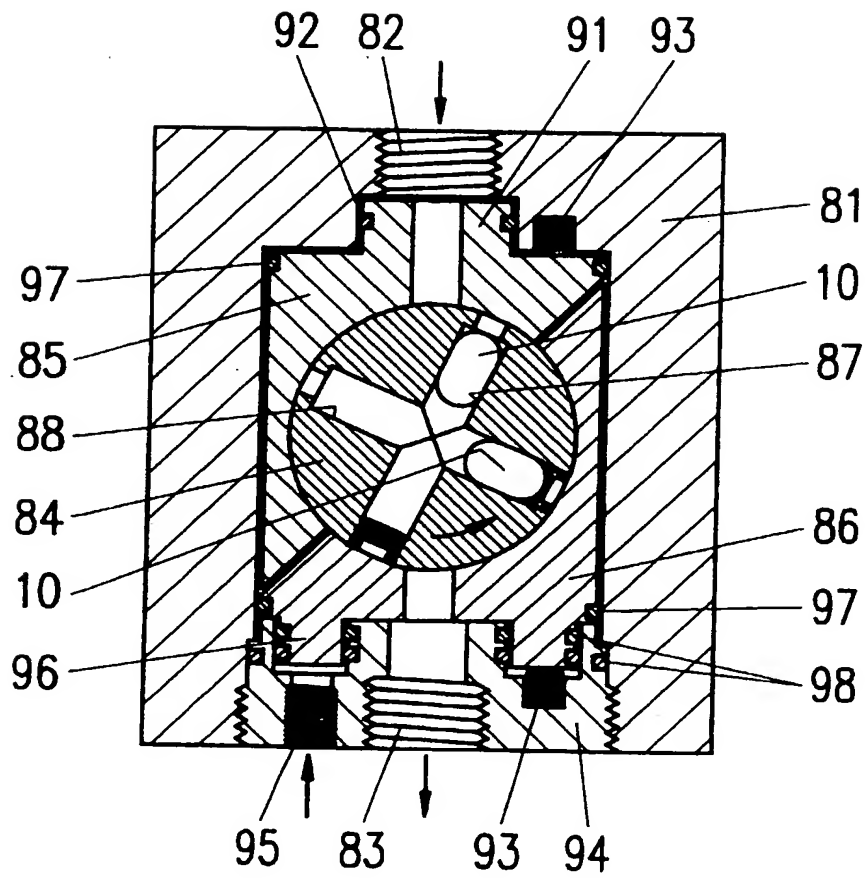


FIG. 7

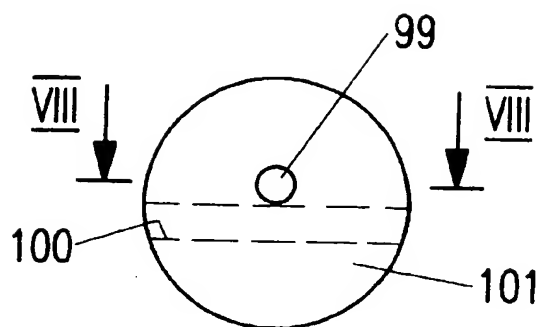


FIG. 8

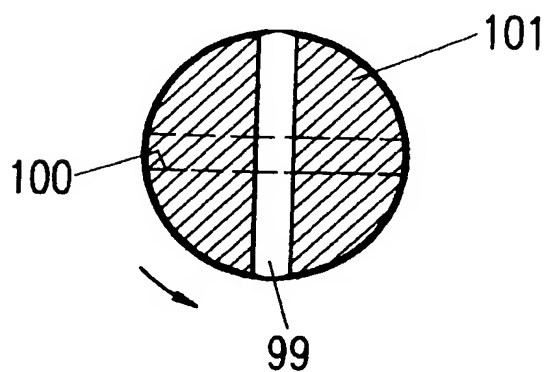


FIG. 9

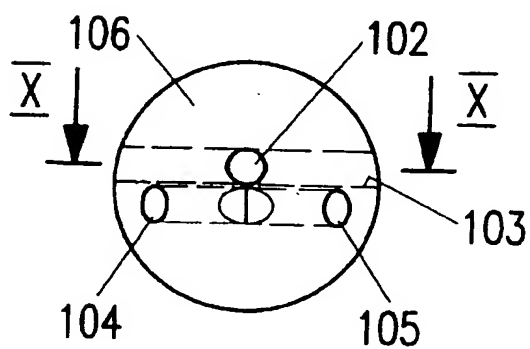


FIG. 10


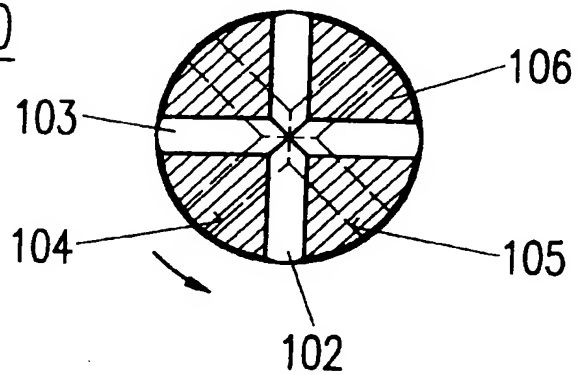


FIG. 11

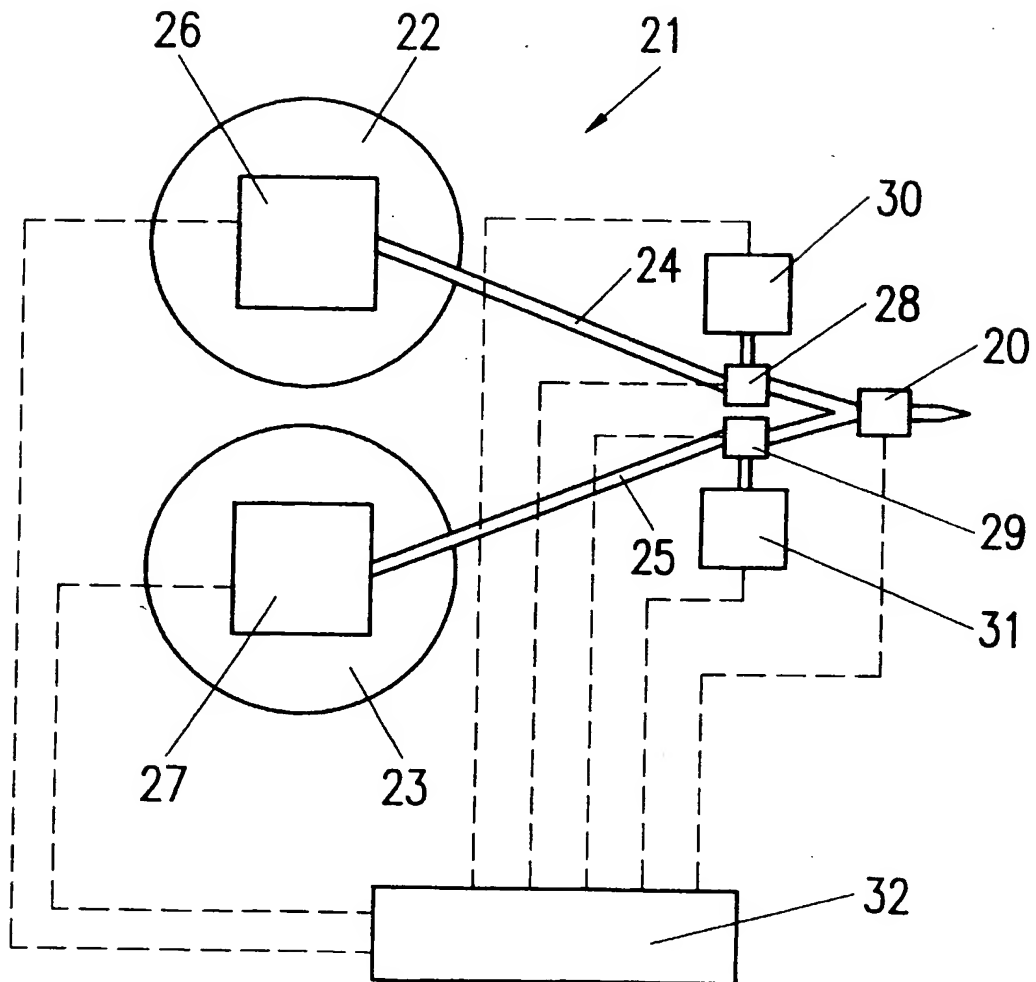

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 97 81 0106

| DOCUMENTS CONSIDERED TO BE RELEVANT  |  |   |   |
|--|--|---|---|
| Category   | Citation of document with indication, where appropriate, of relevant passages            | Relevant to claim                                   | CLASSIFICATION OF THE APPLICATION (Int.Cl.6)    |
| D,Y  | EP 0 646 776 A (KELLER WILHELM A)<br>* the whole document *                              | 1-5,11,<br>12,14                                    | G01F11/04<br>G01F11/22<br>G01F11/06             |
| Y  | WO 92 11512 A (MINNESOTA MINING & MFG)<br>* page 4, line 26 - line 36; figure 1 *        | 1,3-5,<br>11,12,14                                  |   |
| Y  | US 4 491 248 A (BLACKWELL JOHN S)<br>* column 4, line 46 - column 5, line 19; figure 2 * | 2-5,11,<br>12,14                                    |   |
| D,A  | US 3 037 738 A (C.I. JACKSON)<br>* the whole document *                                  | 1,4,5   |   |
| A  | US 5 456 298 A (TENNIS STEVE)<br>* column 4, line 22 - column 5, line 10; figures 3-5 *  | 1,2   |   |
| A  | US 4 416 397 A (BROWN FRANK E)<br>* column 7, line 5 - line 54; figures 11-14 *          | 9   | TECHNICAL FIELDS<br>SEARCHED (Int.Cl.6)<br>G01F |
| A  | US 3 001 543 A (P.D. BARTON)<br>* column 2, line 56 - column 3, line 5; figure 1 *       | 1   |   |
| The present search report has been drawn up for all claims   |  |   |   |
| Place of search<br>THE HAGUE   |  | Date of completion of the search<br>28 October 1997 | Examiner<br>Heinsius, R                         |
| CATEGORY OF CITED DOCUMENTS<br>X: particularly relevant if taken alone<br>Y: particularly relevant if combined with another document of the same category<br>A: technological background<br>O: non-written disclosure<br>P: intermediate document<br>T: theory or principle underlying the invention<br>E: earlier patent document, but published on, or after the filing date<br>D: document cited in the application<br>L: document cited for other reasons<br>&: member of the same patent family, corresponding document |  |   |   |

EPC FORM 1503 (3.12.97) (P/4501)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**